

Micro Door Switch INSTALLATION GUIDE



YOSHIMASA strongly recommend that the Unit be installed by a licensed electrician.

CAUTION

ELECTRIC SHOCK HAZARD, UNPLUG THE POWER STRIP BEFORE WORKING

- A. Unplug the power strip.
- B. Remove the front grill of the Unit.
- C. Please refer to the drawing in a circle at the bottom to Install the Micro Door S/W.
- D. If you don't use the Remote Controller, the Micro Door Switch will be working as an On/Off. For the reason, the Remote Controlling Circuit is no use anymore and you need to bypass it by rewiring:
 1. Cut the wires indicated by **x** orderly from ① through ⑤.
 2. Now you make your choice; you can have the Unit run either in HI or LO speed.
 3. If you pick HI speed, follow **(A)** option to connect the RED and WHITE wires.
 4. For LO speed, follow **(B)** option to connect the RED and BROWN wires.

REMEMBER, you cannot have both options at the same time!
- E. Replace the front grill and plug the power strip to operate the Unit.

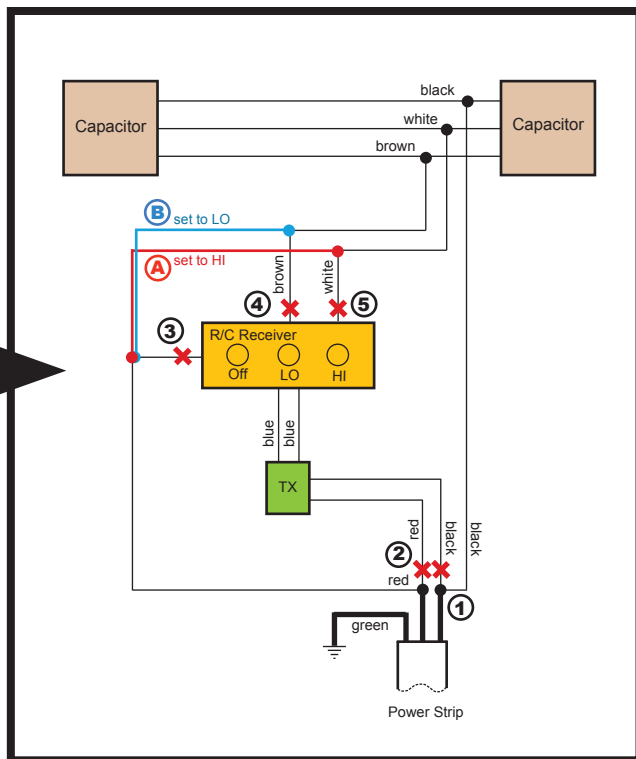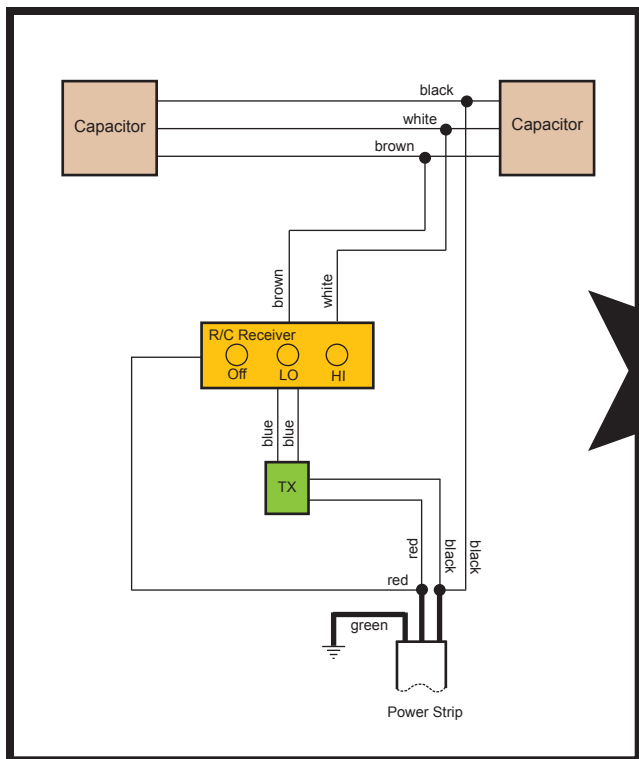

* To install Micro Door Switch, you need enough length of power strips. Also please refer to the Air Curtain User's Manual before working.



YOSHIMASA USA

2730 Monterey St. #103
Torrance, CA 90503
T. (310) 533-1111 F. (310) 533-1117
www.YOSHIMASAUUSA.com

